

OFFICE OF THE MARION COUNTY SURVEYOR

SECTION RECORD CORNER

SECTION 14 TOWNSHIP 15 RANGE 2

DATE: 1-27-05

PARTY CHIEF: Wilcoxen

CREW: _____

TYPE OF MARKER: Harrison



METHOD OF ESTABLISHMENT: County: 5-1-00

IN. S.P.C. E ZONE NAD '83

NAME: 15021401

N: 499899.4593(m)

E: 46664.1959(m)

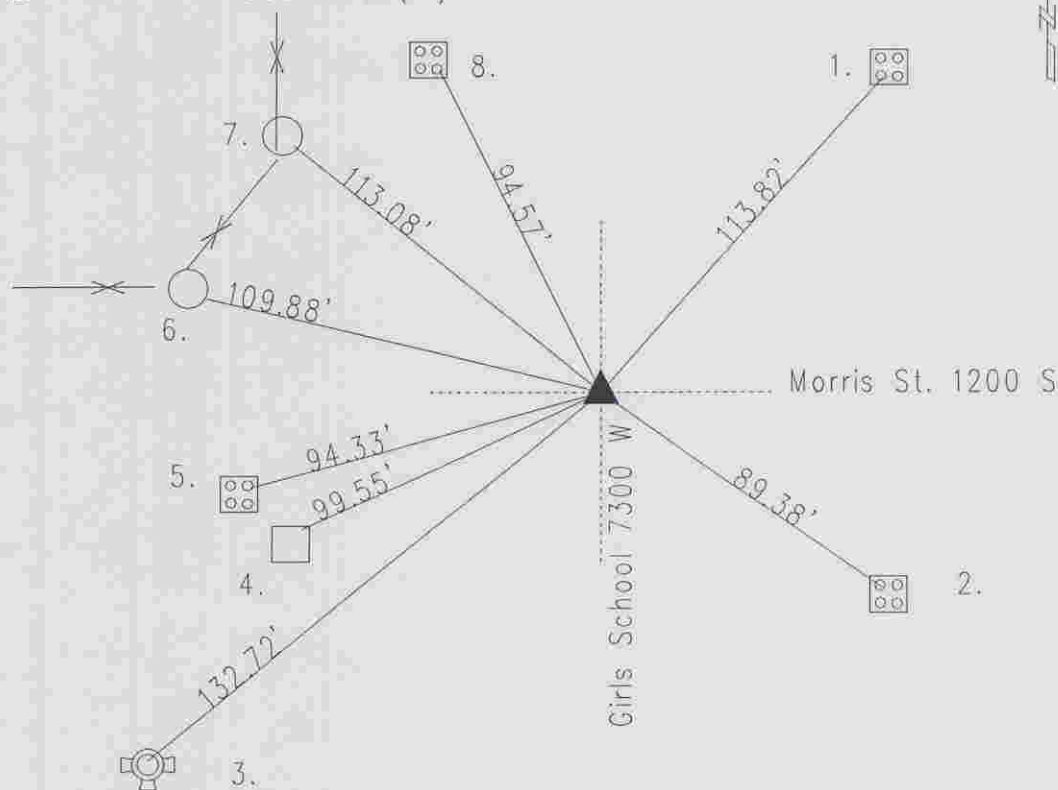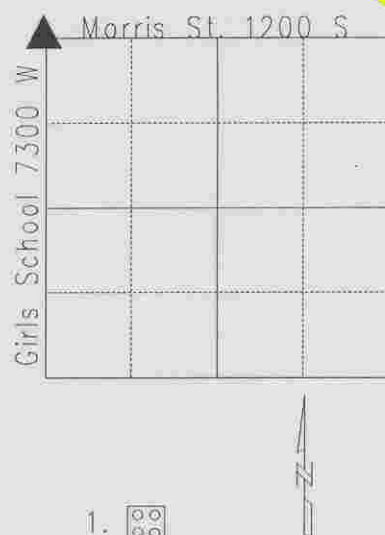

Original set 1820 by Laughlin with witness: 14" white oak N 24 E 38 links, 14" white oak S 22 W 27 links post set per Marion County Atlas pg. 2. 1-8-64 called road nail over stone. 2-12-80 called railroad spike. Excavated 7-12-88 stone found 20" down. Harrison set. Re-tied 11-25-95 with '95 EDM per Wilcoxen. Re-tied 5-1-2000 by Kiste. Re-tied 1-27-05 by Wilcoxen.

15021401

REF.	DISTANCE	DESCRIPTION
1.	113.82'	Cut 'x' SW-bolt of signal base
2.	89.38'	Cut 'x' NW bolt of signal base
3.	132.72'	Top nut of fire hydrant
4.	99.55'	Cut 'x' NE corner concrete signal
5.	94.33'	Cut 'x' NE bolt signal base
6.	109.88'	Face of steel fence post
7.	113.08'	Face of steel fence post
8.	94.57'	Cut 'x' SE-bolt of signal base